



DRYING

STACK DRYERS ECONOMIC LINE FED 2-25 MG



FEATURES

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

VERSATILITY

- Make to order - customization.
- OPL > COIN - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Lint Filter Drawer, stainless steel mesh.
- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console.

OTHERS


- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane
- White panels
- CE approved.

OPTIONS

- M programmer display.
- Lint filter with grid 0,01 In (standard STACK is 0,02 In).

CAPACITY		U.	FED-2-25 MG
Capacity 1/18	Kg		11.7 x 2
	Lb		25.7 x 2
Capacity 1/20	Kg		10.5 x 2
	Lb		23.1 x 2
DRUM			
Ø Drum	mm		750
	inch		29.53
Drum length	mm		475
	inch		18.7
Drum volume	l cu		210
	ft		7.41
Ø Door	mm		574
	inch		22.6
Floor to door center	mm		547 / 1522
	inch		21.54 / 59.92
Floor to lower part of the door	mm		189 / 1164
	inch		7.32 / 45.83
Drum motor power	kW		0.37 x 2
ELECTRIC POWER			
Installed heating power	Kw		12 x 2
Installed electrical power	Kw		25.34
Evaporation capacity	l/h		15.8
	USgallon/h		4.17
Hourly output	Kg/h		31.6
	Lb/h		69.7
GAS POWER			
Installed heating power gas Installed	kcal/h		10327 x 2
	Btu/h		40945.7 x 2
heating power gas	kW		12 x 2
Installed electrical power	Kw		1.34
Instant propane gas consumption (G31)	Kg/h		1.03 x 2
	Lb/h		2.27 x 2
Instant natural gas consumption (G20)	m³/h		1.27 x 2
	cfm		0.75 x 2
Evaporation capacity	l/h		15.3
	USgallon/h		4.042
Hourly output Ø	Kg/h		30.6
	Lb/h		67.5
Gas inlet	BSPP ISO 228-1		1/2"
VENTILATION			
Nominal air flow	m³/h		500 x 2
	cfm		294.28 x 2
Air outlet Ø	mm		200
	inch		8
Fan motor power	kW		0.25 x 2
HEAT DISSIPATION			
Total max heat dissipation	kW		2.4
	Btu/h		8193.9
Front panel max heat dissipation	kW		1.68
	Btu/h		5735.8
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ l + G	Nº x AWG / A	-	3 X 14 / 15 A
Voltage 230V - 3~ + G	-	-	-
Voltage 480V - 3~ + G	-	-	-

DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	785 / 865
	inch	30.91 / 34.06
Net depth / Gross depth	mm	972 / 1055
	inch	38.27 / 41.54
Net height / Gross height	mm	1980 / 2126
	inch	77.95 / 83.70
Net weight / Gross weight	Kg	260 / 268
	Lb	573.2 / 590.84
OTHERS		
Sound level	dB	64

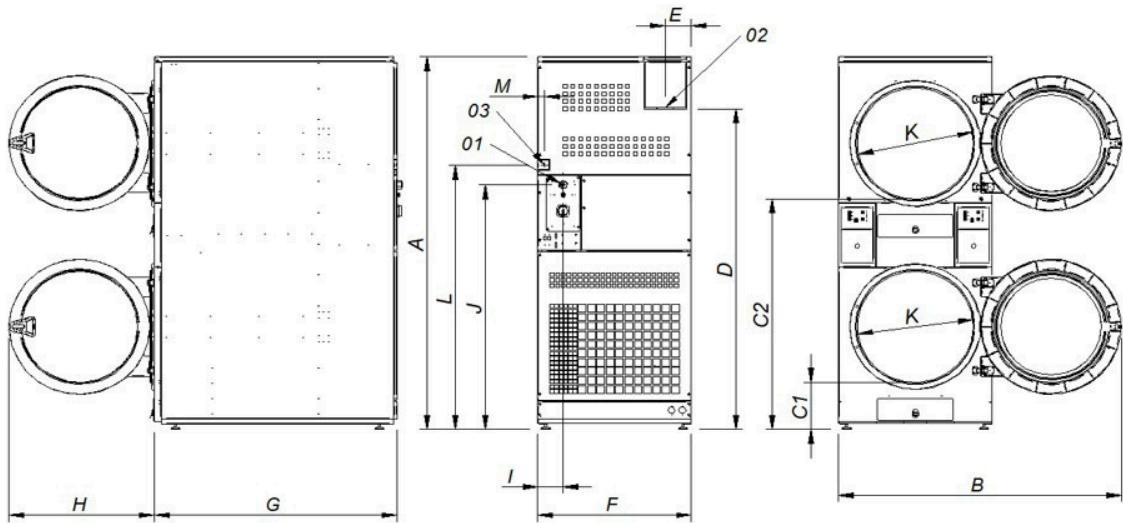

01. Power supply 02.
Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	C2	D	E	F	G	H	I	J	K	L	M
FED-2-25 MG	77.95	56.96	10.07	48.58	66.14	5.31	30.90	38.26	28.93	5.11	50.19	22.63	55.35	1.37

SUMMIT
SummitLaundry.com

Call 855-Summit9
Sales@SummitLaundry.com
120 Spagnoli Rd, #1B
Melville, NY 11747