



DRYING

STACK DRYERS ECONOMIC LINE FED 2-35 MG



CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

VERSATILITY

- Make to order - customization.
- OPL > COIN - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Lint Filter Drawer, stainless steel mesh.
- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console.

OTHERS


- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane
- White panels
- CE approved.

OPTIONS

- M programmer display.
- Lint filter with grid 0,01 In (standard STACK is 0,02 In).

| CAPACITY | | U. | FED-2-35 MG |
|---------------------------------------|----------------|------------|---------------|
| Capacity 1/18 | Kg | | 18.3 x 2 |
| | Lb | | 40.4 |
| Capacity 1/20 | Kg | | 16.5 x 2 |
| | Lb | | 36.3 |
| DRUM | | | |
| Ø Drum | mm | | 750 |
| | inch | | 29.53 |
| Drum length | mm | | 746 |
| | inch | | 29.37 |
| Drum volume | l cu | | 330 |
| | ft | | 11.64 |
| Ø Door | mm | | 574 |
| | inch | | 22.6 |
| Floor to door center | mm | | 547 / 1522 |
| | inch | | 21.54 / 59.92 |
| Floor to lower part of the door | mm | | 189 / 1164 |
| | inch | | 7.32/45.83 |
| Drum motor power | kW | | 0.37 x 2 |
| ELECTRIC POWER | | | |
| Installed heating power | Kw | | 1.12 x 2 |
| Installed electrical power | Kw | | 25.34 |
| Evaporation capacity | l/h | | 18.1 |
| | USgallon/h | | 4.78 |
| Hourly output | Kg/h | | 36.2 |
| | Lb/h | | 79.8 |
| GAS POWER | | | |
| Installed heating power gas Installed | kcal/h | | 10327 x 2 |
| | Btu/h | | 40945.7 x 2 |
| heating power gas | kW | | 12 x 2 |
| Installed electrical power | Kw | | 1.34 |
| Instant propane gas consumption (G31) | Kg/h | | 1.03 x 2 |
| | Lb/h | | 2.27 x 2 |
| Instant natural gas consumption (G20) | m³/h | | 1.27 x 2 |
| | cfm | | 0.75 x 2 |
| Evaporation capacity | l/h | | 18 |
| | USgallon/h | | 4.755 |
| Hourly output Ø | Kg/h | | 36 |
| | Lb/h | | 79.4 |
| Gas inlet | BSPP ISO 228-1 | | 1/2" |
| VENTILATION | | | |
| Nominal air flow | m³/h | | 500 x 2 |
| | cfm | | 294.28 x 2 |
| Air outlet Ø | mm | | 200 |
| | inch | | 8 |
| Fan motor power | kW | | 0.25 x 2 |
| HEAT DISSIPATION | | | |
| Total max heat dissipation | kW | | 2.4 |
| | Btu/h | | 8193.9 |
| Front panel max heat dissipation | kW | | 1.68 |
| | Btu/h | | 5735.8 |
| CONNECTIONS | | ELECTRICAL | GAS |
| Voltage 120/60/1~ I + G | Nº x AWG / A | - | 3 X 14 /15 A |
| Voltage 230V - 3~ + G | - | - | - |
| Voltage 480V - 3~ + G | - | - | - |

| DIMENSIONS / PACKING DIMENSIONS | | |
|---------------------------------|------|-----------------|
| Net width / Gross width | mm | 785 / 865 |
| | inch | 30.91 / 34.06 |
| Net depth / Gross depth | mm | 1242 / 1325 |
| | inch | 48.9 / 52.17 |
| Net height / Gross height | mm | 1980 / 2126 |
| | inch | 77.95 / 83.7 |
| Net weight / Gross weight | Kg | 290 / 317 |
| | Lb | 639.34 / 698.87 |
| OTHERS | | |
| Sound level | dB | 64 |

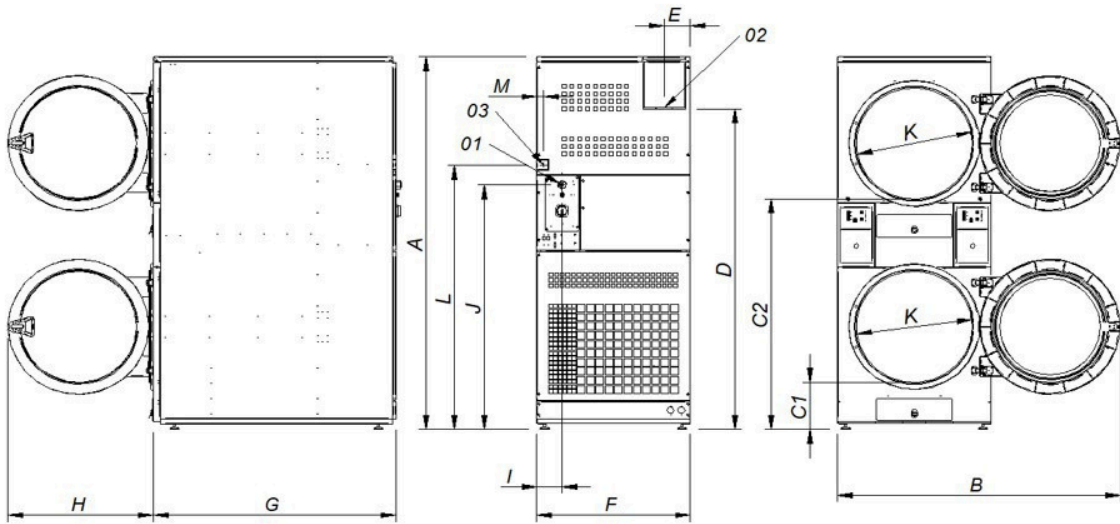

01. Power supply 02.
Fumes output 8"
03. Gas inlet 1/2"

| | A | B | C | C2 | D | E | F | G | H | I | J | K | L | M |
|-------------|-------|-------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|
| FED-2-25 MG | 77.95 | 56.96 | 10.07 | 48.58 | 66.14 | 5.31 | 30.90 | 48.89 | 28.93 | 5.11 | 50.19 | 22.63 | 55.35 | 1.37 |

SUMMIT
SummitLaundry.com

Call 855-Summit9
Sales@SummitLaundry.com
120 Spagnoli Rd, #1B
Melville, NY 11747