



WASHING

HIGH SPIN WASHERS HIGH CAPACITY FWH-135C TP2



FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor 450.

EFFICIENCY

- Energy Optimization.
- Optimal load.
- Low water consumption.

VERSATILITY

- Electric or Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL

ERGONOMICS

- Large Loading Doors: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS


- Drum in stainless steel AISI 304.
- 3 water inlets.
- Soft mounted, free standing washers.
- Panels in skin plate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. .
- High spin washers with suspended drum.

OPTIONS

- Extra dosing pump DB-1.
- Double drain.
- Tropicalized coating.
- Tilting options: frontal or double tilt.
- Automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.

DRUM		U.	FWH - 135C TP2	
Load capacity	1:9 / 1:10	Lb.	143.3/130.1	
Volume		CU.FT	20.8	
Diameter		In	41.3	
Depth		In	26.8	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	38 / 875	
G Factor		-	450	
Maximum force transmitted		KN	18 ±4.2	
Frequency-dynamic force		Hz	12,66	
Noise level		dB	< 70	
Coin laundry version		-	No	
Double drain		-	Opt.	
Weighing System / Tilting System		-	Opt.	
SLUICE option		-	No	
DOOR				
Height center door / Height door		In	46.1 / 31.9	
Diameter		In	22.1	
POWER				
Motor		Hp	20.1	
Electric heating power		kW	36	
Total electric power (electric model)		kW	39	
Total electric power (hw, steam model)		kW	15	
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G		Nº x AWG / A	-	-
Voltage 230/3~ + G		Nº x AWG / A	4 x 2 / 125A	4 x 8 / 50A
Voltage 440-480/3 ~ + G		Nº x AWG / A	4 x 4 / 90A	4 x 10 / 30A
Steam inlet (Steam model)		inch	3/4"	
Maximum steam consumption (Steam model)		lbs/h	21	
Water inlet		inch	1"	
Water main pressure		Kg/cm2	2-4	
Maximum water consumption		Gal/h	157.9	
Drain		mm/inch	3"	
Drainage capacity		Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width		In	55.91 / 63	
Net Depth / Gross Depth		In	56.42 / 62.8	
Net Height / Gross Height		In	74.41 / 76	
Net weight / Gross weight		Lbs.	3206 / 3405	
Volume		Ft3	173	

* Programmed No. 2, 100% load

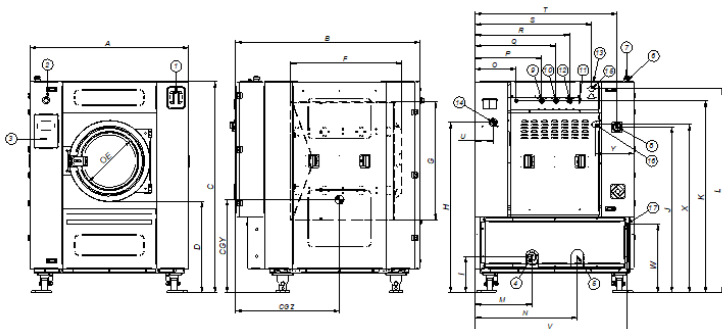

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain 1
- 05. Drain 2
- 06. Electric connection to liquid soap pump
- 07. Electrical connection
- 08. Main switch connection to liquid soap pump
- 09. Auxiliary water inlet
- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Steam output
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
FWH-135C	mm	1420	1433	1890	810	560	760	1050	1563	323	1475	1710	1817	508	912	367	595	720	845	1040	1267	160	1353	608	1500	348	830	820
	In	55.91	56.42	74.41	31.89	22.05	38.27	41.34	61.54	12.72	58.07	67.32	71.54	20.00	35.91	14.45	23.43	28.35	33.27	40.94	49.88	6.30	53.27	23.94	59.06	13.70	32.68	32.28

DRUM		U.	FWH - 135C TP2	
Load capacity 1:9 / 1:10		Lb.		
Volume		CU.FT		
Diameter		In		
Depth		In		
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.		
G Factor		-		
Maximum force transmitted		KN		
Frequency-dynamic force		Hz		
Noise level		dB		
Coin laundry version		-		
Double drain		-		
Weighing System / Tilting System		-		
SLUICE option		-		
DOOR				
Height center door / Height door		In		
Diameter		In		
POWER				
Motor		Hp		
Electric heating power		kW		
Total electric power (electric model)		kW		
Total electric power (hw, steam model)		kW		
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G		N° x AWG / A		
Voltage 230/3~ + G		N° x AWG / A		
Voltage 440-480/3 ~ + G		N° x AWG / A		
Steam inlet (Steam model)		inch		
Maximum steam consumption (Steam model)		lbs/h		
Water inlet		inch		
Water main pressure		Kg/cm2		
Maximum water consumption		Gal/h		
Drain		mm/inch		
Drainage capacity		Gal/min		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width		In		
Net Depth / Gross Depth		In		
Net Height / Gross Height		In		
Net weight / Gross weight		Lbs.		
Volume		Ft3		

* Programmed No. 2, 100% load

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	
FWH-135C	mm	1.420	1.433	1.890	810	560	760	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	1.500	348	830	
	In	55,91	56,42	74,41	31,89	22,05	38,27	41,34	61,54	12,72	58,07	67,32	71,54	20,00	35,91	14,45	23,43	28,35	33,27	40,94	49,88	6,30	53,27	23,94	59,06	13,70	32,68	32,28