



WASHING



HIGH SPIN WASHERS HIGH CAPACITY FWH-230C TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-FACTOR 350.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Electric or Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL

ERGONOMICS

- Large Loading doors: Ø700.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum in stainless steel AISI 304.
- 3 water inlets.
- Soft mounted, free standing washers.
- Panels in skin plate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. .
- High spin washers with suspended drum.

OPTIONS


- Extra dosing pump DB-1.
- Double drain.
- Tropicalized coating.
- Tilting options: frontal or double tilt.
- Automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.



Call 855-Summit9
Sales@SummitLaundry.com
120 Spagnoli Rd, #1B
Melville, NY 11747

DRUM		U.	FWH - 230C TP2
Load capacity	1:9 / 1:10	Lb.	105/95
Volume		CU.FT	950
Diameter		In	1360
Depth		In	637
GENERAL DETAILS			
Washing speed / Spinning speed		r.p.m.	34 / 678
G Factor		-	350
Maximum force transmitted		KN	37.77 ±5.25
Frequency-dynamic force		Hz	11.33
Noise level		dB	<70
Coin laundry version		-	No
Double drain		-	Opt.
Weighing System / Tilting System		-	Opt.
SLUICE option		-	No
DOOR			
Height center door / Height door		In	52.4/35.5
Diameter		In	27.6
POWER			
Motor		Hp	20.1
Electric heating power		kW	-
Total electric power (electric model)		kW	-
Total electric power (hw, steam model)		kW	15
CONNECTIONS		STEAM / HOT WATER	
Voltage 208-240/60/3~ + G		N° x AWG / A	4 x 6 / 70A
Voltage 440-480/3 ~ + G		N° x AWG / A	4 x 8 / 45A
Steam inlet (Steam model)		inch	1-1/4"
Maximum steam consumption (Steam model)		lbs/h	26.5
Water inlet		inch	1-1/2"
Water main pressure		Kg/cm2	2-4
Maximum water consumption		Gal/h	279.3
Air inlet		Kg/cm2	4
Drain		mm/inch	4"
Drainage capacity		Gal/min	132
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width		In	72.28/76.4
Net Depth / Gross Depth		In	67.32/80
Net Height / Gross Height		In	88.39/90.2
Net weight / Gross weight		Lbs.	5071.5/5733
Volume		Ft3	317.8

* Programmed No. 2, 100% load

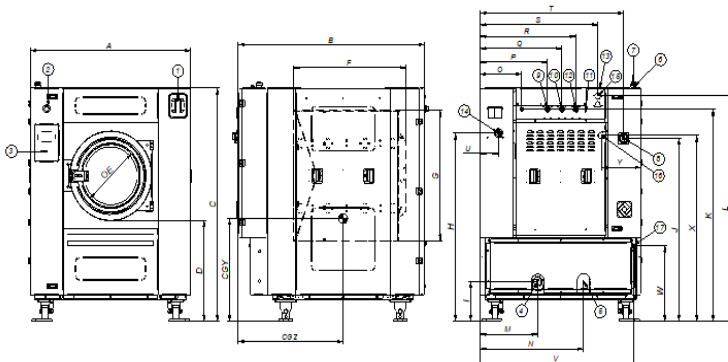

- 31. Soap dispenser
- 32. Emergency stop
- 33. USB port
- 34. Drain 1
- 35. Drain 2
- 36. Electric connection to liquid soap pump
- 37. Electrical connection
- 38. Main switch
- 09. Auxiliary water inlet
- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Steam output
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Y	Z	CGY	CGZ	
FWH-230C	mm	1836	1710	2245	945	700	792	1350	1740	336	1781	2038	2110	1095	1092	494	634	774	954	994	1239	1646	165	2049	2050	717	853	1025
	In	72.28	67.32	88.39	37.20	27.56	31.18	53.15	68.50	13.23	70.12	80.24	83.07	43.11	42.99	19.45	24.96	30.47	37.56	39.13	48.78	64.80	6.50	80.67	80.71	28.23	33.58	40.35