



WASHING



HIGH SPIN WASHERS HIGH CAPACITY FWH-275C TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-FACTOR 350.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Electric or Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL

ERGONOMICS

- Large Loading Doors: Ø700.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum in stainless steel AISI 304.
- 3 water inlets.
- Air inlet.
- Soft mounted, free standing washers.
- Panels in skin plate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product.
- High spin washers with suspended drum.

OPTIONS

- Extra dosing pump DB-1.
- Double drain.
- Tropicalized coating.
- Tilting options: frontal or double tilt.
- Automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.




SUMMIT
SummitLaundry.com

Call 855-Summit9

Sales@SummitLaundry.com
120 Spagnoli Rd, #1B
Melville, NY 11747

DRUM		
Load capacity 1:9 / 1:10	U.	FWH - 275C TP2
Volume	Lb.	286.7/253.6
Diameter	CU.FT	40.6
Depth	In	53.6
	In	30
GENERAL DETAILS		
Washing speed / Spinning speed	r.p.m.	34 / 678
G Factor	-	350
Maximum force transmitted	KN	37.77 ±5.25
Frequency-dynamic force	Hz	11.33
Noise level	dB	<70
Coin laundry version	-	No
Double drain	-	Opt.
Weighing System / Tilting System	-	Opt.
SLUICE option	-	No
DOOR		
Height center door / Height door	In	52.4/35.5
Diameter	In	27.6
POWER		
Motor	Hp	15
Electric heating power	kW	-
Total electric power (electric model)	kW	-
Total electric power (hw, steam model)	kW	15
CONNECTIONS		
Voltage 208-240/60/3~ + G	Nº x AWG / A	4 x 6 / 70A
Voltage 440-480/3 ~ + G	Nº x AWG / A	4 x 8 / 45A
Steam inlet (Steam model)	inch	1-1/4"
Maximum steam consumption (Steam model)	lbs/h	26.5
Water inlet	inch	1-1/2"
Water main pressure	Kg/cm2	2-4
Maximum water consumption	Gal/h	331.1**
Air inlet	Kg/cm2	4
Drain	mm/inch	4"
Drainage capacity	Gal/min	132
DIMENSIONS / PACKING DIMENSIONS		
Net Width / Gross Width	In	72.28/76.4
Net Depth / Gross Depth	In	72.13/80
Net Height / Gross Height	In	88.39/90.2
Net weight / Gross weight	Lbs.	6090/6743
Volume	Ft3	317.8

* Programmed No. 2, 100% load

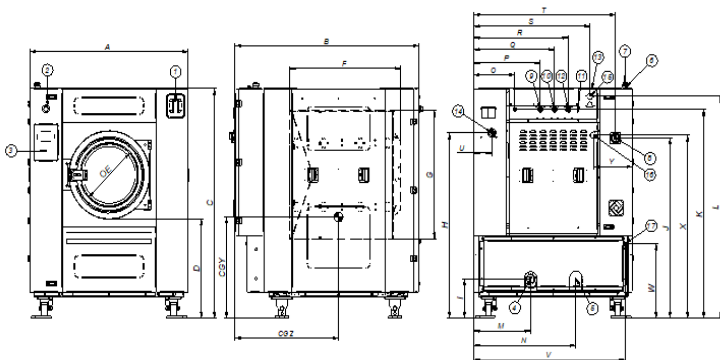

- . Soap dispenser
- . Emergency stop
- . USB port
- . Drain 1
- . Drain 2
- . Electric connection to liquid soap mp
- . Electrical connection
- . Main switch

- 09. Auxiliary water inlet
- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Steam output
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Y	Z	CGY	CGZ	
FWH-275C	mm	1836	1832	2245	945	700	930	1350	1740	336	1781	2038	2110	1095	1092	494	634	774	954	994	1239	1646	165	2049	2050	717	853	1130
	In	72.28	72.13	88.39	37.20	27.56	36.61	53.15	68.50	13.23	70.12	80.24	83.07	43.11	42.99	19.45	24.96	30.47	37.56	39.13	48.78	64.80	6.50	80.67	80.71	28.23	33.58	44.49