



WASHING

NORMAL SPIN WASHER EXTRACTORS HIGH CAPACITY FWS-135C TP2



FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable.
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 Languages.
- 8 dosing signals.

G FACTOR

- High G-Factor 150.

EFFICIENCY

- Energy Optimization.
- Optimal load.
- Low water consumption.

VERSATILITY

- Custom- Make to order.
- OPL or COIN.
- Electric or Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Large Loading Doors: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skin plate.
- 3 water inlets (Water inlet hoses not included).
- CB and WRAS approved.

OPTIONS

- Extra dosing pump DB-1.
- Anchoring base.
- Double drain.
- Water inlet hose.
- Relay card with 6 extra dosing signals.
- Reversible door opening.
- Tropicalized coating.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Coin / token kit.
- Auto unlock kit for the door.
- Stainless steel AISI 304 outer casing.
- Front soap dispenser.

DRUM		U.	FWS - 135C TP2	
Load capacity 1:9 / 1:10		Lb.	143.3 / 130.1	
Volume		CU.FT	21.2	
Diameter		In	41.3	
Depth		In	26.9	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	42,5 / 505	
G Factor		-	150	
Maximum force transmitted		KN	9.12 ±15	
Frequency-dynamic force		Hz	6.93	
Noise level		dB	< 70	
Coin laundry version		-	YES	
Double drain		-	OPT.	
Weighing System / Tilting System		-	NO	
SLUICE option		-	YES	
DOOR				
Height center door / Height door		In	35.5 / 21.3	
Diameter		In	22.1	
POWER				
Motor		Hp	7.4	
Electric heating power		kW	36	
Total electric power (electric model)		kW	38	
Total electric power (hw, steam model)		kW	5.5	
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G		N° x AWG / A	-	-
Voltage 230/3~ + G		N° x AWG / A	4x 2 / 125A	4x 8 / 50A
Voltage 440-480/3 ~ + G		N° x AWG / A	4x 6 / 70A	4x 10/30A
Steam inlet (Steam model)		inch	3/4"	
Maximum steam consumption (Steam model)		lbs/h	21	
Water inlet		inch	1"	
Water main pressure		Kg/cm2	2-4	
Maximum water consumption		Gal/h	165.8**	
Drain		mm/inch	3"	
Drainage capacity		Gal/min	200	
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width		In	48.23 / 52.6	
Net Depth / Gross Depth		In	57.77/ 56.7	
Net Height / Gross Height		In	64.57 / 73.3	
Net weight / Gross weight		Lbs.	1746.4 / 1936	
Volume		Ft3	21.1	

* Programmed No. 2, 100% load

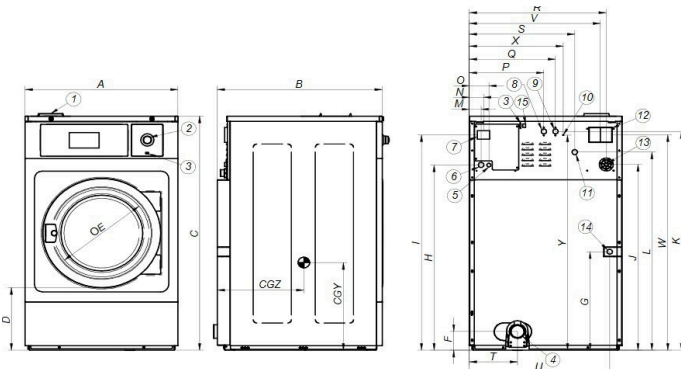

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliary water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
FWS-135C	mm	1225	1315	1640	540	560	115	984	1368	1536	1306	1551	1318	61	74	101	651	731	1110	869	318	1163	1080	1470	992	1595	644	972
	In	48.23	51.77	64.57	21.26	22.05	4.53	38.74	53.86	60.47	51.42	61.65	1.89	2.40	2.91	3.98	25.63	28.78	43.70	34.21	12.52	45.79	42.52	57.87	39.06	62.80	25.35	38.27