

WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY FWS-30 TP2



FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable.
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 Languages.
- 8 dosing signals.

G FACTOR

- High G-Factor of 200.

EFFICIENCY

- Energy Optimization.
- Optimal load.
- Low water consumption.

VERSATILITY

- Custom- Make to order.
- OPL or COIN.
- Electric or Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Large Loading doors: Ø373.
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skin plate.
- 3 water inlets.
- CB and WRAS approved.

OPTIONS

- Extra dosing pump DB-1.
- Anchoring base.
- External double drain 3".
- Relay card with 6 extra dosing signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized coating.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Coin / token kit.
- Auto unlock kit for the door.

DRUM		U.	FWS - 30 TP2	
Load capacity	1:9 / 1:10	Lb.	30.9/28.7	
Volume		CU.FT	4.6	
Diameter		In	24.4	
Depth		In	16.9	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	53/759	
G Factor		-	200	
Maximum force transmitted		KN	2.31 ±4	
Frequency-dynamic force		Hz	8,93	
Noise level		dB	<70	
Coin laundry version		-	Yes	
Double drain		-	Opt.	
Weighing System / Tilting System		-	No	
SLUICE option		-	Yes	
DOOR				
Height center door / Height door		In	22.5/12.2	
Diameter		In	14.7	
POWER				
Motor		Hp	1.5	
Electric heating power		kW	9	
Total electric power (electric model)		kW	9.5	
Total electric power (hw, steam model)		kW	1.1	
CONNECTIONS		ELECTRIC		STEAM / HOT WATER
Voltage 208-240/60/1~ + G	N° x AWG / A	3 x 6 / 50A		3x 14 / 15A
Voltage 208-240/60/3~ + G	N° x AWG / A	4 x 10 / 32A		-
Voltage 440-480/3 ~ + G	N° x AWG / A	4 x 12 / 20A		-
Steam inlet (Steam model)	inch	1/2"		
Maximum steam consumption (Steam model)	lbs/h	8,5		
Water inlet	inch	3/4"		
Water main pressure	Kg/cm2	2-4		
Maximum water consumption	Gal/h	20,8*		
Drain	mm/inch	3"		
Drainage capacity	Gal/min	52.8		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width		In	28.31/30.8	
Net Depth / Gross Depth		In	33.70/39.0	
Net Height / Gross Height		In	45.87/55.2	
Net weight / Gross weight		Lbs.	463.1/540.2	
Volume		Ft3	38.1	

* Programmed No. 20, 75% load

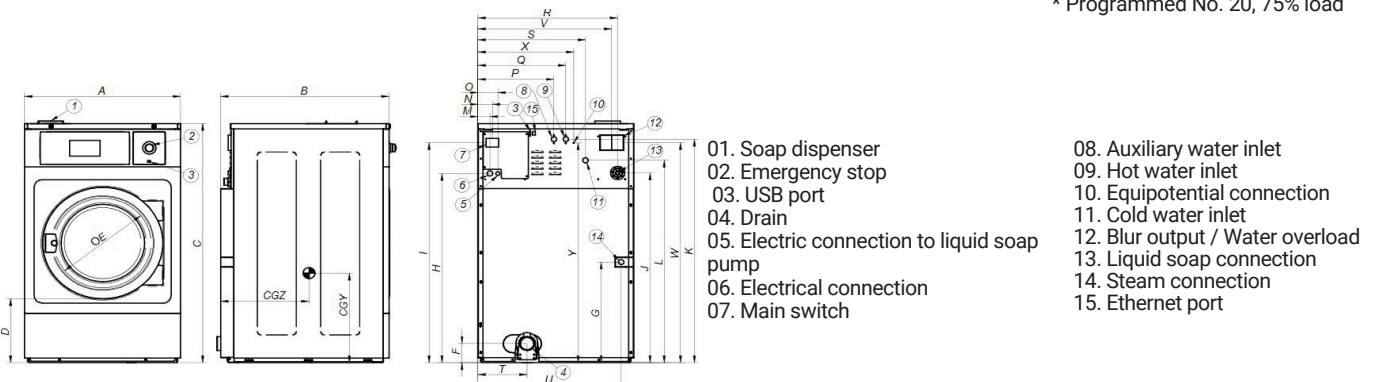

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
FWS-30	mm	719	856	1165	310	373	143	440	886	1.054	889	1073	958	61	74	101	316	376	637	475	211	654	607	1053	416	1053	484	524
	In	28.31	33.70	45.87	12.20	14.69	5.83	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	41.46	16.38	41.46	19.06	20.63