



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY FWS-80C TP2



FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable.
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 Languages.
- 8 dosing signals.

G FACTOR

- G-FACTOR 200.

EFFICIENCY

- Energy Optimization.
- Optimal load.
- Low water consumption.

VERSATILITY

- Custom- Make to order.
- OPL or COIN.
- Electric or Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Large Loading Doors: Ø560 (for FWS-80C/100C).
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skin plate.
- 3 water inlets.
- CB and WRAS approved.

OPTIONS

- Double drain.
- Normally closed valve.
- Silicon gasket (for FWS-80).
- Relay card with 6 extra dosing signals.
- Reversible door opening.
- Tropicalized coating.
- Stainless steel outer casing.
- Stainless steel front panel.
- Anchoring base.
- Coin / token kit.
- Delayed door opening in case of power outage.

DRUM		U.	FWS -80C TP2	
Load capacity	1:9 / 1:10	Lb.	86/77.2	
Volume		CU.FT	12.4	
Diameter		In	33.9	
Depth		In	23.7	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	45/644	
G Factor		-	200	
Maximum force transmitted		KN	4,59 ±8	
Frequency-dynamic force		Hz	7,58	
Noise level		dB	<70	
Coin laundry version		-	Yes	
Double drain		-	Opt.	
Weighing System / Tilting System		-	No	
SLUICE option		-	Yes	
DOOR				
Height center door / Height door		In	29/17.3	
Diameter		In	22.1	
POWER				
Motor		Hp	5.4	
Electric heating power		kW	21	
Total electric power (electric model)		kW	22	
Total electric power (hw, steam model)		kW	4	
CONNECTIONS		ELECTRIC		STEAM / HOT WATER
Voltage 208-240/60/1~ + G	Nº x AWG / A	-		3 x 12 / 20A
Voltage 230/3~ + G	Nº x AWG / A	4 x 6 / 70A		4 x 12 / 20A
Voltage 440-480/3 ~ + G	Nº x AWG / A	4 x 8 / 45A		-
Steam inlet (Steam model)	inch	3/4"		
Maximum steam consumption (Steam model)	lbs/h	18		
Water inlet	inch	3/4"		
Water main pressure	Kg/cm2	2-4		
Maximum water consumption	Gal/h	52.7*		
Drain	mm/inch	3"		
Drainage capacity	Gal/min	52.8		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width		In	38.54/41.2	
Net Depth / Gross Depth		In	45.47/50.4	
Net Height / Gross Height		In	55.55/65.2	
Net weight / Gross weight		Lbs.	1049.6/1124.6	
Volume		Ft3	77.7	

* Programmed No. 20, 75% load

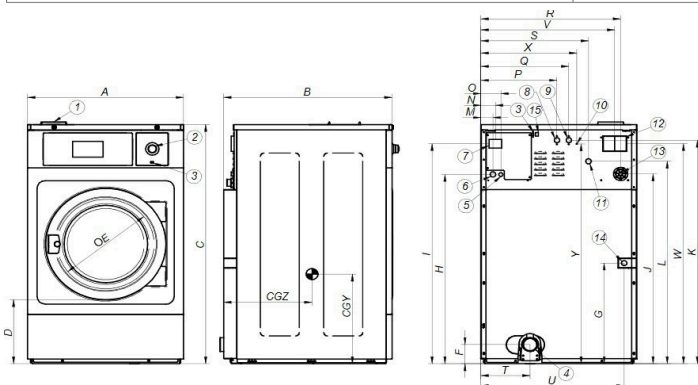

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliary water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
FWS-80C	mm	979	1155	1411	370	560	149	623	1139	1307	1116	1322	1211	61	74	101	545	625	885	715	262	917	855	1281	760	1373	635	682
	In	38.54	45.47	55.55	14.57	22.05	5.87	24.53	44.84	51.46	43.94	52.05	47.68	2.40	2.91	3.98	21.45	24.61	34.84	28.15	36.10	32.72	33.66	24.57	29.92	54.06	26.85	26.85